


W wakefieldmetals

Contents

Types Of Aluminium	29
Sheet.....	33
Marine Sheet.....	33
Coil	34
Possum Coil	34
Stucco Embossed Sheet.....	35
Roofing, Stucco Coil.....	35
Treadplate	35
General Purpose Plate	36
Marine Plate	36
Machining Plate	36
Round Bars	38
Free Machining Round Bars	39
Flat Bars.....	40
Square Bars	41
Round Tube	42
Scaffold Tube	42
Square Tube	43
Rectangular Tube.....	43
Channel.....	43
Angles	44
Top Hat Section.....	44
Coaming Rail	45
Tipper Sub Frame.....	46
Din Rail	46

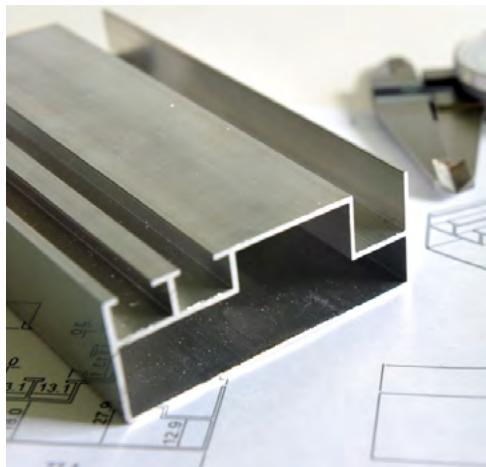

Types Of Aluminium

Descriptions and General Uses

1200	General purpose commercially pure aluminium. Good formability. Excellent resistance to corrosion. Low strength, easily weldable. Typical applications include spinning and hollowware, i.e. domestic cooking utensils, general sheet metal work, panelling and mouldings.
5005	A medium strength alum-magnesium. Not susceptible to stress corrosion, fine-grained suitable for pressings. Suitable for anodising. Typical applications include appliances and utensils, general sheet metal work and marine applications.
5052	Similar to 5251 with comparable mechanical properties but with a slightly higher magnesium content. Typical application include sheet metal work, appliances and marine applications.
5083	The highest strength non heat-treatable alloy in general commercial use. Possesses high as-weld properties and excellent corrosion resistance. Not recommended for use in corrosive environments at temperatures above 60°C. Typical applications include welded assemblies such as pressure vessels, marine applications such as ship superstructures, aircraft, cryogenics, TV towers and drilling rigs.
5086	A high strength alloy with mechanical properties that lie between 5083 and 5454. Excellent corrosion resistance and good weldability. Formability is better than 5083. Typical applications are the same as 5083.
5251	A medium strength alum-magnesium alloy. Good ductility and corrosion resistance. Weldable. Typical applications include sheet metal work, appliances, marine and road vehicles, pressing and containers.
7075	A very high strength aluminium alloy used as tooling plate, good machinability and hardness, not suitable for welding. Poor corrosion resistance, the strength of this alloy is equal to that of commercial quality steel. Typical application is tooling.
6005	A medium to high strength alum-magnesium-silicon alloy having similar mechanical properties to those specific for alloy 6351. Typical application are structural such as ladder sections, transport and marine.
6060	A medium strength alum-magnesium-silicon alloy. Good mechanical properties, corrosion resistance and weldability. Similar to alloy 6063. Used to obtain highly complex shapes. Typical applications include architectural and general-purpose extrusions.
6061	A medium to high strength alum-magnesium-silicon alloy. Good mechanical properties, corrosion resistance and weldability. Typical applications include structural uses where corrosion resistance is needed such as cranes and bridges, road and rail transport, marine, bolts and nuts.
6063	A medium strength alum-magnesium-silicon alloy for intricate extruded sections. Forms well in T4 temper. High corrosion resistance, good surface finish. Typical applications include furniture, architectural extrusions, general purpose extrusions and irrigation tubing.
6261	A medium to high strength alum-magnesium-silicon special purpose structural alloy. Good surface finish and corrosion resistance, Good weldability. Responses well to anodising. Typical applications include yacht masts, road transport sections, ladder sections.
Supercut 20	A high strength alum-copper alloy, true free machining, giving highly fragmented chips. Attractive surface finish. Suitable for die stamping. Not suitable for decorative anodising.

Temper Designations

Extrusions and Sheet

F	As fabricated. Applied to material that acquires some temper from shaping processes not having special control over the amount of strain hardening.
O	Annealed, recrystallised. Applies to the softest temper of wrought products.

Rolled Product

H111	Strain hardened less than the amount required for controlled H11 temper
H112	Some temper is acquired incidental to the shaping process and for which there are mechanical property limits or mechanical property testing is required.
H12	Strain hardened - 1/4 hard
H14	As for H12 but to a greater degree - 1/2 hard
H24	Strain hardened then partially annealed
H32	Strain hardened then stabilised - magnesium alloys only - 1/4 hard
H321	Strain hardened less than the amount required for a controlled H32 temper. It is especially fabricated to have acceptable resistance to stress corrosion cracking and exfoliation attack. H116 is also used for this application
H116	Especially fabricated to have acceptable resistance to stress corrosion cracking and exfoliation attack. Similar to H321
H34	Strain hardened then stabilised - magnesium alloy - 1/2 hard
T651	Solution heat-treated. Artificially aged. Stress relieved by controlled stretching 1.5 - 3%

Extrusions

T3	Solution heat treated then cold worked and naturally aged
T4	Solution heat treated then naturally aged
T5	Cooled from elevated temperature then artificially aged
T6	Solution heat treated then artificially aged
T8	Solution heat treated, cold worked and then artificially aged (usually drawn tube)
T6511	Solution heat-treated. Artificially aged. Stress relieved by controlled stretching.

Aluminium Water Stain Prevention

When You Receive Metal

1. Check for wetness.

- (a) Is the metal wet? Is the wrapping paper puckered up or wet?
- (b) If it is wet, note it on all copies of the receiving papers.
- (c) Inform the Purchasing Department or Quality Control immediately.

2. Check to see if the metal feels cold.

If it does:

- (a) Tell your supervisor immediately.
- (b) Leave the metal in a cool indoor area away from drafts to allow it to warm up slowly. (If this is not done, and metal is put in a heated warehouse immediately, it may sweat and become water stained.)
- (c) After the metal is reasonably warm (about a day later), move it to the warehouse.

When You Move Metal Between Areas

Check to see if the temperature in the area the metal will be taken to is higher than the temperature in the area the metal is coming from.

If the difference is more than 11oC (20oF):

- (a) Only move as much metal as will be used immediately.
- (b) Tell your supervisor.
- (c) Leave the remainder of the metal where it is until ready for use.

Note:

If you experience any signs of moisture, dampness or water staining on your delivery, please call your local Wakefield Metals Service Centre immediately.

Corrosion Prevention

Aluminium and its alloys have excellent durability and corrosion resistance, but, like most materials, their behaviour can be influenced by the way in which they are used. Aluminium's natural affinity with oxygen results in the formation of a transparent oxide film when aluminium is exposed to air. This oxide film is generally 5 to 10mm thick, extremely hard, chemically stable, corrosion resistant and adheres strongly to the parent metal surface. If damaged in any way, it will reform if enough oxygen is available. The film is removed to facilitate anodising or welding. In anodising, a thicker, more controlled deposit of oxide film is added. In welding, the oxide film inhibits metal fusion.

Galvanic Corrosion

Takes place when dissimilar metals are coupled together in the presence of moisture. The severity of the corrosion depends largely on the circumstances in which the electrolytic couple formed producing a current flow from the less noble metal (anode) to the more noble metal (cathode) and resulting in corrosion of the less noble metal. Galvanic corrosion may be prevented by insulating dissimilar metals from each other with an electrically inert, non-absorbent barrier.

Simple Rules to Avoid Corrosion

Since the corrosion behaviour of alloyed aluminium is influenced by the physical conditions of the environment, contact with dissimilar metals and by the presence of crevices, the design of equipment made with aluminium can have an appreciable influence on the nature and rate of corrosion.

- Never use aluminium in anaerobic (no oxygen) conditions.
- Seal all joints and bolt holes.
- Eliminate corners and crevices which are difficult to clean.
- Butt weld where possible.
- Avoid dissimilar metal contact whenever possible.

The Electro-Chemical Series

BASE METAL Magnesium

Zinc

Aluminium

Cadmium

Mild Steel

Cast Iron

Lead

Tin

Brasses

Copper

Bronzes

Monel Metal

Silver Solders (70% Ag 30% Cu)

Nickel

Stainless Steel (Type 304)

Silver

Titanium

Graphite

Gold

NOBLE METAL Platinum

Contact With Materials

Wood

- Dry wood has no reaction to aluminium.
- Unseasoned/damp wood should be coated with an aluminium or bituminous paint.
- Treated timber may require special consideration and referral to the supplier.

Insulation

- Foam, felt, fire retardant may cause corrosion of aluminium if they become wet when in contact with it.
- Protect the aluminium by using an inert barrier.

Concrete

- No protection under perfectly dry conditions.
- As these conditions are rare, all aluminium surfaces in direct contact with concrete should be coated with bituminous paint.

Chemicals

- A direct chemical attack of aluminium only occurs to any great extent in strong acid or alkaline conditions.
- In some cases the temperature may significantly alter the rate of chemical reaction or be a major factor in initiating chemical attack.

Sheet

5005 H32



Thickness mm	Width x Length mm	Weight kg/sheet	Mill Finish	PE50
0.5	1200 x 2400	3.89	0000475	
0.7	1200 x 2400	5.44	0000476	
0.7	900 x 2400	4.08	0000474	
0.9	1200 x 2400	7.00	0000470	0014742
0.9	1200 x 3600	10.50		0014744
1.2	1200 x 2400	9.33	0000464	0014745
1.2	1200 x 3600	14.00	0000467	0014747
1.2	900 x 2400	7.00	0000463	
1.6	1200 x 2400	12.44	0000457	0014748
1.6	1200 x 3600	18.66		0014750
2.0	1200 x 2400	15.55	0000452	0014751
2.0	1200 x 3600	23.33		0014753
2.5	1200 x 2400	19.44	0000449	
3.0	1200 x 2400	23.32	0000442	0014757
3.0	1200 x 3600	34.99	0000446	0014759

Marine Sheet

5251 H32



Thickness mm	Width x Length mm	Weight kg/sheet	Mill Finish	PE50	PE80/100
1.2	1200 x 2400	9.32	0000550		
1.6	1200 x 2400	12.43	0000545		
2.0	1200 x 2400	15.53	0000541		
2.0	1500 x 3600	29.13	0000544		
2.5	1200 x 2400	19.42	0000537		
3.0	1200 x 2400	23.30	0000530	0014758	
3.0	1200 x 4800	46.60	0000531		
3.0	1500 x 3600	43.69	0000534	0014271	
3.0	1500 x 4800	58.97	0016566		
3.0	1200 x 6100	58.26	0000532		0018759

Mill Finish As produced by the mill

Coatings Protective coatings can be applied to all stock sizes on request

Coil

5005 H32



Thickness mm	Width mm	Mill Finish
0.7	1200	0000513
0.9	1200	0000510
0.9	1200	0014231
1.2	1200	0000508
1.6	1200	0000505
2.0	1200	0000501
3.0	1200	0000498
3.0	1500	0016585

Coil

5251 H32



Thickness mm	Width mm	Mill Finish
2.0	1200	0000524
2.0	1500	0000525
2.5	1200	0000522
3.0	1200	0000520
3.0	1500	0000521

Size Sheet can be cut to length to your specific requirements on our modern Cut-to-length-Line. Protective coatings can be applied to all stock sizes on request.

Possum Coil

5005 H34



Thickness mm	Width mm	Mill Finish	Painted Lichen/ Grey	Coil weight kg
0.45	600	0000518		25
0.45	900		0017638	25

Roofing Coil

5052



Thickness mm	Width mm	Temper	Mill Finish
0.9	1200	H32	0017643
0.9	1220	H34	0018333
0.9	1220	H36	0015106
0.9	610	H34	0018373
0.9	940	H34	0018332
0.9	940	H36	0014699

Stucco Embossed Sheet

5005 H32



Thickness mm	Width x Length mm	Weight kg/sheet	Mill Finish
1.2	1200 x 2400	9.33	0012034

Stucco Coil


5005 H32



Thickness mm	Width mm	Mill Finish
0.7	1200	0000519
0.9	1200	0017403
1.2	1200	0000507

Treadplate - 5 Bar Pattern

5251 O/H114



Thickness mm	Width x Length mm	Weight kg/Sheet	Mill Finish
2.0	1200 x 2400	17.30	0000761
3.0	1200 x 2400	25.90	0000758
4.0	1200 x 2400	34.80	0000756
4.0	1200 x 4800	69.80	0000757
4.0	1450 x 5000	82.65	0017749
5.0	1200 x 2400	41.04	0017008
6.0	1200 x 2400	51.80	0000754

General Purpose Plate

5005 H32



Thickness mm	Width x Length mm	Weight kg/Sheet	Mill Finish
5.0	1200 x 2400	38.88	0000719
6.0	1200 x 2400	46.66	0000718

Marine Plate

5251 H32



Thickness mm	Width x Length mm	Weight kg/Sheet	Mill Finish
4	1200 x 2400	31.07	0000722
4	1200 x 4800	61.82	0000723
5	1200 x 2400	38.84	0000720

Machining Plate

6061 T6



Thickness mm	Width x Length mm	Weight kg/Sheet	Mill Finish
20.0	1250 x 2500	168.75	0017518
25.0	1250 x 2500	210.94	0017519
30.0	1250 x 2500	253.13	0017520
40.0	1250 x 2500	345.94	0017521
50.0	1250 x 2500	430.31	0017522
65.0	1250 x 2500	556.88	0017523
80.0	1250 x 2500	683.44	0017524

Mill finish: As produced by the mill

Size: Plates can be cut to size to your specific requirements on our modern Beam-Saw

Offcuts: Please refer to our sales teams for plate Offcuts

Coatings: Protective coatings can be applied to stock sizes on request

Marine Sheet & Plate

5083



Thickness mm	Width x Length mm	Temper	Weight kg/Sheet	Mill Finish	PE80/100
3	1200 x 2400	H321	22.95	0000558	
3	1830 x 6100	H321	88.95	0000561	0018760
4	1200 x 2400	H116/321	30.60	0013884	
4	1200 x 4800	H116/321	61.20	0013885	
4	1200 x 6100	H116/321	77.80	0014081	0018761
4	1200 x 8200	H116/321	104.54	0013886	
4	1830 x 6100	H116/321	118.77	0013887	0018762
5	1200 x 2400	H116/321	38.20	0013888	
5	1200 x 4800	H116/321	76.50	0013889	
5	1200 x 6100	H116/321	97.20	0013890	0018763
5	1830 x 6100	H116/321	148.20	0013891	0018764
6	1200 x 2400	H116/321	45.90	0013892	
6	1200 x 6100	H116/321	116.65	0013894	0018765
6	1830 x 6100	H116/321	177.89	0013896	0018766
8	1200 x 2400	H116/321	61.20	0013897	
8	1830 x 6100	H116/321	237.20	0013899	0018767
10	1200 x 2400	H116/321	76.50	0000680	
10	1200 x 4800	H116/321	153.00	0000678	
10	1830 x 6100	H116/321	296.50	0000679	
12	1200 x 2400	H116/321	91.80	0000676	
12	1830 x 6100	H116/321	355.80	0000675	
16	1830 x 6100	H116/321	475.10	0000673	
20	1200 x 2400	H116/321	153.22	0000670	
25	1200 x 2400	H116/321	191.23	0000668	
32	1200 x 2400	H116/321	245.15	0000667	
40	1200 x 2400	H111/112	306.00	0000665	
50	1200 x 2400	H111/112	390.24	0000664	
60	1200 x 2400	H111/112	459.00	0013086	
80	1200 x 2400	H111/112	611.90	0000662	

Mill Certs: 5083 H116/321 plate is available with either Lloyds or DNV Certification

Mill finish: As produced by the mill

Size: Plates can be cut to size to your specific requirements on our modern Beam-Saw

Offcuts: Please refer to our sales teams for plate Offcuts

Coatings: Protective coatings can be applied to stock sizes on request

Round Bars

6060



Diameter mm	Length M	Weight kg/m	Product No.
4.76	5	0.05	0001195
6.35	5	0.09	0001196

Round Bars

6061



Diameter mm	Temper	Length M	Weight kg/m	Product No.
8.00	T6	5.00	0.14	0001198
9.53	T6	5.00	0.19	0001199
12.70	T6	5.00	0.34	0001200
15.88	T6	5.00	0.54	0001202
19.05	T6	5.00	0.77	0001204
25.40	T6	5.00	1.37	0001206
31.75	T6	5.00	2.14	0001208
38.10	T6	5.00	3.09	0001210
44.50	T6	5.00	4.19	0001212
50.80	T6	5.00	5.46	0001213
57.15	T6511	3.66	6.96	0013665
63.50	T6511	3.66	8.55	0013666
66.70	T6511	3.66	9.45	0001218
69.90	T6511	3.66	10.38	0001221
76.20	T6511	3.66	12.35	0001221
88.90	T6511	3.66	17.31	0013667
101.60	T6511	3.66	21.98	0001226
114.30	T6511	3.66	28.74	0014653
130.00	T6511	3.66	35.83	0013875
152.50	T6511	3.66	51.10	0014654
165.10	T6511	3.66	59.97	0014655
177.80	T6511	3.66	67.04	0017446
203.20	T6511	3.66	87.56	0017323
215.90	T6511	3.66	102.55	0014657

Free Machining Round Bars

Supercut 20



Diameter mm	Temper	Length M	Weight kg/m	Product No.
10.00	T3	3	0.22	0017321
13.00	T3	3	0.37	0017390
16.00	T3	3	0.57	0017322
20.00	T3	3	0.83	0001244
23.00	T3	3	1.18	0001245
26.00	T3	3	1.51	0001246
32.00	T3	3	2.29	0001248
40.00	T4	3	3.50	0001250
45.00	T4	3	4.53	0001252
52.00	T4	3	6.06	0001253
60.00	T4	3	7.86	0001254
65.00	T4	3	9.46	0001255
80.00	T4	3	13.98	0001256
90.00	T4	3	17.70	0001257
105.00	T4	3	24.38	0001258
130.00	T4	3	37.28	0001259
160.00	T4	3	56.32	0001260

Free machining Supercut 20 has excellent machinability, producing fine chips and a very good finish.

Flat Bars

6060



Width x Wall Thickness mm		Length M	Weight kg/m	Product No.
12.00	3.00	5	0.10	0001114
19.00	3.00	5	0.15	0001121
25.00	3.00	5	0.20	0001124
25.00	4.50	5	0.31	0001125
25.00	6.00	5	0.41	0001126
25.00	9.00	5	0.61	0001127
25.00	12.00	5	0.81	0001128
32.00	3.00	5	0.26	0001131
32.00	4.50	5	0.39	0001132
38.00	3.00	5	0.31	0001134
38.00	4.50	5	0.46	0001135
38.00	6.00	5	0.62	0001136
38.00	9.00	5	0.93	0001137
38.00	12.00	5	1.23	0001139
50.00	3.00	5	0.41	0001142
50.00	4.50	5	0.61	0001143
50.00	6.00	5	0.81	0001144
50.00	10.00	5	1.36	0001145
50.00	12.00	5	1.63	0001146
50.00	25.00	5	3.39	0001148
75.00	3.00	5	0.61	0001155
76.00	6.00	5	1.22	0001156
75.00	12.00	5	2.44	0001158
75.00	25.00	5	5.06	0001160
76.20	9.53	5	1.97	0001157
100.00	3.00	5	0.81	0001162
100.00	6.00	5	1.63	0001164
101.60	9.00	5	2.48	0001165
100.00	12.00	5	3.24	0001166
127.00	12.70	5	4.36	0001174
150.00	12.00	5	4.86	0001177

Flat Bars

6061



Width x Wall Thickness mm		Temper	Length M	Weight kg/m	Product No.
50.80	25.40	T6511	3.66	3.48	0015092
63.50	25.40	T6511	3.66	4.40	0001153
63.50	31.80	T6511	3.66	5.46	0001154
75.00	40.00	T6	5.00	8.10	0001161
76.20	38.10	T6511	3.66	7.84	0015093
76.20	50.80	T6511	3.66	10.45	0014651
76.20	63.50	T6511	3.66	13.06	0014652
100.00	25.00	T6	5.00	6.75	0001168
100.00	40.00	T6	5.00	10.80	0001169
101.60	50.80	T6511	3.66	13.94	0015094
101.60	76.20	T6511	3.66	20.90	0015095
127.00	76.20	T6511	3.66	26.13	0015097
127.00	101.60	T6511	3.66	34.84	0015098
152.00	76.20	T6511	3.66	31.35	0015099

Square Bars

6061



Size mm	Temper	Length M	Weight kg/m	Product No.
19.05	T6	5.00	0.98	0001184
25.40	T6	5.00	1.74	0001186
31.80	T6	5.00	2.72	0001187
38.10	T6	5.00	3.92	0001189
50.80	T6	5.00	6.97	0001191
63.50	T6511	3.66	10.89	0014658
76.20	T6511	3.66	15.68	0015102
101.60	T6511	3.66	27.88	0015103
127.00	T6511	3.66	43.55	0014659
152.40	T6511	3.66	62.71	0014660

Round Tube

6060



Outside Diameter x Wall Thickness mm		Length M	Weight kg/m	Product No.
6.35	1.42	5	0.06	0000770
9.53	1.42	5	0.10	0000773
12.70	1.42	5	0.14	0000774
15.88	1.42	5	0.17	0000777
15.88	2.64	5	0.30	0000776
19.05	1.42	5	0.21	0000779
21.00	3.35	5	0.50	0000782
22.23	1.42	5	0.25	0000783
25.40	1.42	5	0.29	0000790
25.00	3.00	5	0.56	0000785
28.58	1.42	5	0.33	0000793
31.80	1.42	5	0.37	0000799
31.00	5.00	5	1.10	0000797
32.00	3.00	5	0.74	0000798
38.10	1.42	5	0.44	0000805
38.00	3.00	5	0.89	0000803
50.80	1.42	5	0.60	0000817
50.00	3.00	5	1.20	0000816
50.00	6.00	5	2.25	0000815
63.50	3.25	5	1.66	0000820
65.00	6.00	5	3.00	0000821
75.00	3.00	5	1.83	0000822
76.20	6.35	5	3.79	0000823
100.00	3.00	5	2.48	0000827
100.00	6.00	5	4.78	0000826
125.00	3.00	5	3.10	0000829
150.00	3.50	5	4.35	0000831

Scaffold Tube

6061 T6



Outside Diameter x Wall Thickness mm		Length M	Weight kg/m	Product No.
48.4	4.47	6	1.67	0000812

Square Tube

6060



Width x Height x Wall Thickness mm			External Radius mm	Length M	Weight kg/m	Product No.
25.00	25.00	1.80		5	0.45	0000836
25.00	25.00	3.00		5	0.72	0000835
31.80	31.80	3.20		5	0.98	0000838
40.00	40.00	2.00	3.60	5	0.80	0000840
40.00	40.00	3.00	3.00	5	1.19	0000842
50.00	50.00	3.00		5	1.53	0000847
50.00	50.00	3.00	4.00	5	1.62	0016194
100.00	100.00	3.00		5	3.15	0000852

Rectangular Tube

6060



Width x Height x Wall Thickness mm			External Radius mm	Length M	Weight kg/m	Product No.
50.00	25.00	3.00		5	1.12	0000857
50.00	25.00	3.00	4.00	5	1.08	0012944
50.00	40.00	3.00		5	1.36	0000858
65.00	50.00	3.00		5	1.77	0000859
75.00	25.00	2.20		5	1.13	0000860
75.00	40.00	6.00		5	3.34	0000861
100.00	50.00	3.00		5	2.34	0000867
100.00	50.00	6.00		5	4.48	0000866

Channel

6060



Width x Leg Height x Wall Thickness mm			Length M	Weight kg/m	Product No.
20.0	20.0	3.0	5	0.44	0001326
25.0	25.0	3.0	5	0.56	0001329
40.0	20.0	3.0	5	0.60	0001332
50.0	25.0	3.0	5	0.76	0001335
75.0	40.0	4.5	5	1.84	0001338
100.0	50.0	6.0	5	3.05	0001345
150.0	75.0	6.0	5	4.68	0001348

Equal Angles

6060



Width x Height x Wall Thickness mm			Length M	Weight kg/m	Product No.
19.00	19.00	3.00	5	0.29	0001276
25.00	25.00	1.50	5	0.20	0001278
25.00	25.00	3.00	5	0.38	0001279
25.00	25.00	4.50	5	0.55	0001280
30.00	30.00	3.00	5	0.46	0001282
40.00	40.00	3.00	5	0.63	0001287
40.00	40.00	4.50	5	0.92	0001288
40.00	40.00	6.00	5	1.20	0001289
50.00	50.00	3.00	5	0.79	0001291
50.00	50.00	4.50	5	1.17	0001293
50.00	50.00	6.00	5	1.53	0001294
75.00	75.00	4.50	5	1.76	0001296
75.00	75.00	6.00	5	2.33	0001297
100.00	100.00	6.00	5	3.14	0001299
100.00	100.00	10.00	5	5.13	0001301

Unequal Angles

6060



Width x Height x Wall Thickness mm			Length M	Weight kg/m	Product No.
50.00	25.00	3.00	5	0.58	0001312
75.00	40.00	4.50	5	1.46	0001316
75.00	50.00	6.00	5	1.93	0001317
100.00	50.00	6.00	5	2.33	0001319
150.00	75.00	6.00	5	3.55	0001321
150.00	75.00	10.00	5	5.85	0001322

Top Hat Section

6261 T6


Overall Width x Top Width x Height mm			Length M	Weight kg/m	Product No.
55.0	28.0	24.0	6	0.71	0001361

Heavy Transport Sections

Coaming Rail

6005A T5

Width x Height mm	Length M	Weight kg/m	Product No.
114.3	215.9	5.4	0001374
114.3	215.9	7.2	0001373
114.3	215.9	7.3	0012797

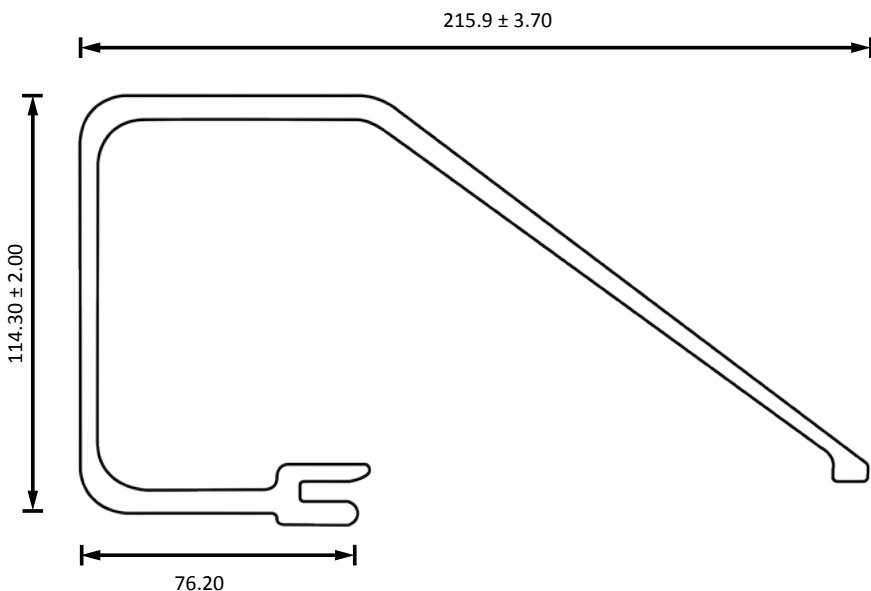


Heavy Transport Sections

Tipper Sub Frame

6005A T5

Height mm	Length M	Weight kg/m	Product No.
232.6	5.4	13.92	0001367
232.6	7.2	13.92	0001366

232.60 ± 1.70

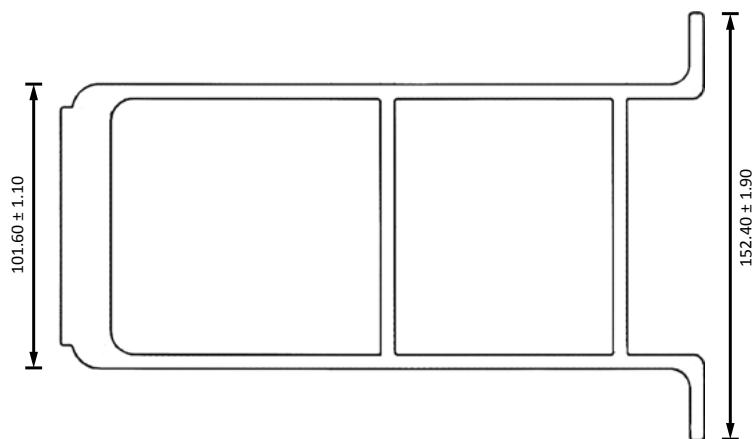

Electrical Sections

Din Rail

Width x Height mm	Length M	Weight kg/m	Product No.
35.2	13.0	0.38	0001380

